


PRE-TERMINATED COPPER CABLES

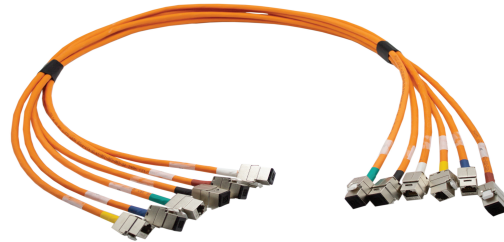

DESCRIPTION

Datacom Pre-terminated Copper Trunk Cables has been designed to offer the easiest and quickest method of installing Copper links. With more and more installation jobs becoming time critical , minimising on-site termination time has never been more crucial. All the time consuming terminations are made , tested and labelled in a quality controlled factory. All the installer has to do is mount the unloaded panels into a cabinet, pull in the pre-terminated links, mount the sockets into the unloaded panel and outlets where required. To ensure the correct length links are ordered.

APPLICATION

- Quick Installation in Datacentre.
- Ideal For 10GBase-T applications.
- 1000Base-TX Gigabit Ethernet requirement.
- 4/16 Mbps Token Ring (IEEE 802.3)

FEATURES

- Pre-terminated, pre-tested and colour coded.
- Makes on-site installation quick and easy.
- Suitable for Cat 6A, Cat 6.
- 25 year warranty available.
- Terminated in a quality controlled factory.
- 100% tested to relevant cabling standard.
- Measuring, pre-installation services and training available.

STANDARDS COMPLIANCE

- ANSI/TIA 568.2-D
- ISO/IEC 11801
- International EN 50173-1
- EN 50288-4-4; IEC 60332-3-24
- ROHS

PHYSICAL CHARACTERISTICS

Length	Customized
Number of Cable	4, 6 or 12 way
Type of Cable	Cat 6A

ORDERING INFORMATION

Description

DATACOM 6 PORT CAT6A F/FTP B2CA LSZH PRE-TERMINATED BOTH ENDS WITH CAT6A FTP KEYSTONE JACK

Part No.

DC-CXFTC6AJJLZ-XXM

** XX : Varries from 1-100Metr