

## DUAL SECTION WALLMOUNT CABINET



### DESCRIPTION

Datacom dual section wall mount cabinet is suitable for applications where security and accessibility are required, and floor space is at a premium. The cabinets are designed to hold multiple pieces of voice/data equipment comfortably. Datacom wall mount cabinets are constructed with rigid frames that can be fitted on a wall, ventilation is provided to allow active equipment to be installed, making it an ideal solution for small LANs, retail units, and remote sites. Datacom double-section wall-mounted enclosures are designed to hold standard 19" rack-mounted equipment and patch panels. The double section cabinet features a swing that allows easy back entry, a lockable glass door, adjustable front profiles, and removable entry plates at the top and bottom.

### APPLICATION

- LAN & WAN networking
- Telecommunications
- Network wiring closets
- Audio / Video System
- Security System

### STANDARDS COMPLIANCE

- ANSI/EIA RS-310-D
- IEC297-2
- DIN41491
- ETSI Standard

### FEATURES

- Dual section frame structure for easy back entry
- Constructed with rigid frames that can be fitted on a wall.
- Adjustable mounting rails in the front and rear.
- Top and bottom cable entry facility for easy cable installation
- Front section with glass door and lock
- Good ventilation and heat dispersion.
- Back section depth- 100mm; swing-out
- Removable side doors

### STANDARD PACKAGING






- Assembled Cabinet and keys, locks, two adjustable ANSI/EIA RS-310-D complied cage nut rails, removable cover panel for vent on top of cabinet, assembly hardware and rear cable routing accessory kit.

# DUAL SECTION WALLMOUNT CABINET

## CONSTRUCTION

Material	SPCC quality cold rolled steel Thickness:1.2mm Tempered glass Thickness:5mm
Loading Capacity	Static loading: 60kg
Degree of protection	IP20
Surface Finish	Painted with high-quality polyester baked oven-dried protective paint
Front panels	3mm tempered glass fitted with end metal panels. Left and right side hinge options supplied with cylinder lock and keys
Side panels	Quick-release lockable and removable Side panels
Rear Plate	Removable rear plate
Color	RAL 7035 / RAL 9005
Ventilation	Two grill cutouts are provided on the top Panel to accommodate 120X120mm fans. Ventilation slots on the top, bottom and sides of the cabinet.

## TECHNICAL DRAWINGS

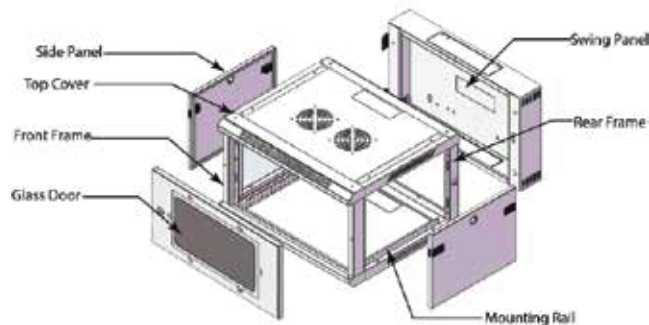

## ORDERING INFORMATION

### Description

Datacom Dual Section Wall Mount Cabinet Removable Side Panel With 19" Equipment Rack

### Part No.

DC-RK-xx-WD-y\*\*

Where "DC" is constant denotes Datacom, RK= Rack, "xx" for Cabinet height range varies from 04 to 21  
 WD stands for 'Wall mount Dual Section Variable 'y' stands for the cabinet depth – value is 1 & 4. 1=500mm, 4=600mm  
 \*\* indicates color. If no value by default cabinet color is White gray RAL 7035  
 \*\* B – denotes the black color