


## INLINE HING TYPE JOINT CLOSURE IP68 FLIP OVER

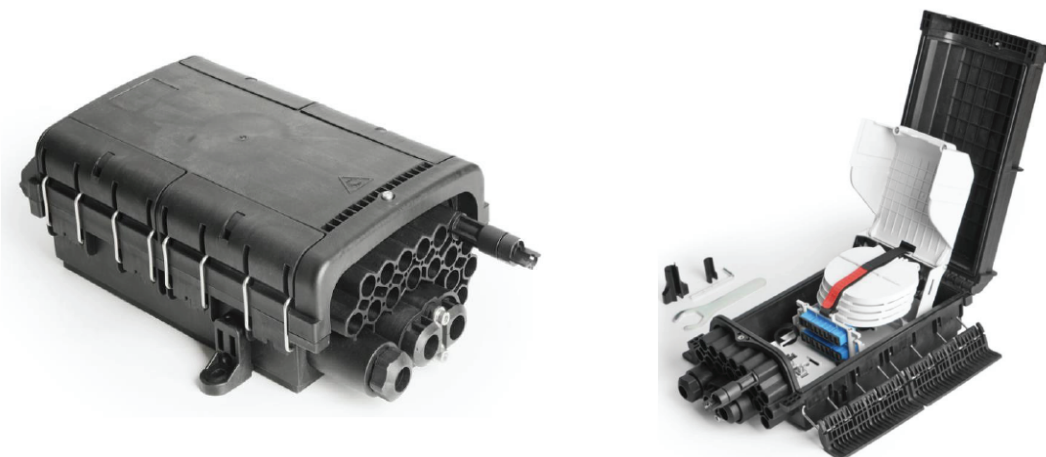

### DESCRIPTION

Datacom Flip over closure is used as a termination point for the feeder cable to connect with the drop cable in network system. It is designed to seal without screws. The compact size and flip-over cover bring easy operation as well as multi-purpose application. It could be installed in aerial, wall, pole and pipeline-mounted mode.

### APPLICATION

- Aerial
- Wall
- Pole Mounting.

### STANDARDS COMPLIANCE

- ROHS



### FEATURES

- Cable ports: 1 port for uncut cable  $\Phi$  10-17.5 mm, 1 pcs branch port for  $\Phi$  10-17.5 mm cable, 16 pcs drop cable ports (applicable for 2\*3mm soft cable or  $\Phi$ 3-8mm round cable).
- All tray are hinged at one side, which is convenient for the operation of each fiber trays.
- No screw flip over structure, support plug and play and fast open service for new subscribers.
- Capacity: max capacity is 96F, support 4 pcs 24f trays. 16 pcs SC adaptor and mini splitter can be installed.
- Production grade: Mechanical sealing mode, protection grade is up to IP 68.
- Installation mode: Suitable for Aerial, Pipe line, Manhole, and Underground mounting.

# INLINE HINGE TYPE JOINT CLOSURE IP68 FLIP OVER

CONSTRUCTION	
Style	In-line / Horizontal
Weight (kg)	3.0 - 4.0
Material	The compound of Polypropylene with glass fibers
Sealing Type	Mechanical Seal
Protection Grade	IP68
Cable ports	1 uncut port( $\Phi$ 10-17.5 mm); 1 branch ports( $\Phi$ 10-17.5 mm) 16 drop cable ports(2*3mm soft cable or $\Phi$ 3-8mm round cable)
Fiber Splice Capacity Maximum	96
Tray Capacity Maximum	24
Tray Count Maximum	4
Tray (Dimensions(mm))	112 x 68 x 8 mm
Additional Mounting Accessories	Wall Mount & Pole Mount

## TECHNICAL DRAWINGS

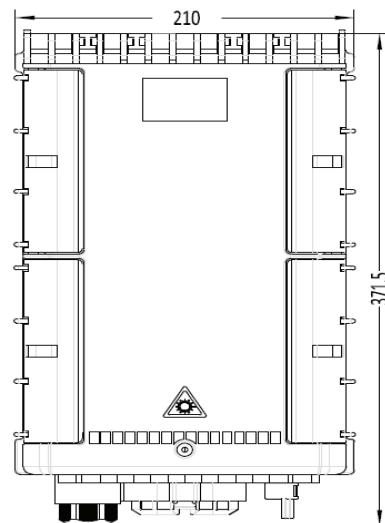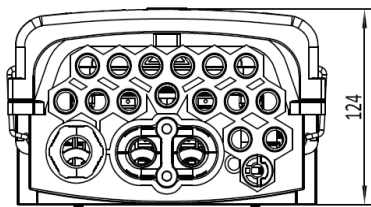

## ORDERING INFORMATION

### Description

Datacom Inline Hinge Type Joint Closure IP68 Rated With 96F Splice Tray Flip Over

### Part No.

DC-JCIH096F-FO